



## Features

- High surge capability
- Short response time
- Low clamping voltage -  $V_c$
- Low sensitivity to mildly activated fluxe
- +125 °C maximum continuous operating temperature
- RoHS compliant\*

## ZV50S2220452NIR1 - SMD Low Voltage, High Surge Varistor

### General Information

The Model ZV50S2220452NIR1 low voltage multilayered varistor is designed to protect sensitive electronic devices against high voltage surges in the low voltage region. This model offers excellent transient energy absorption due to improved energy volume distribution and power dissipation.

In addition, this ZV model exhibits independent suppression characteristics enabling stable protection over a wide temperature range of -55 to +125 °C.


ZV varistors are typically applied to protect integrated circuits and other components at the circuit board level.

### Additional Information

Click these links for more information:



### Multilayered Varistor Symbol



### Absolute Maximum Ratings

| Parameter                                                            | Value         | Units |
|----------------------------------------------------------------------|---------------|-------|
| <b>Continuous:</b>                                                   |               |       |
| Steady State Applied Voltage                                         |               |       |
| DC Voltage ( $V_{dc}$ )                                              | 63            | V     |
| AC Voltage ( $V_{rms}$ )                                             | 50            | V     |
| <b>Transient:</b>                                                    |               |       |
| Peak Single Pulse Surge Current, 8/20 $\mu$ s Waveform ( $I_{max}$ ) | 4500          | A     |
| Operating Ambient Temperature                                        | -55 to +125   | °C    |
| Storage Temperature Range                                            | -55 to +150   | °C    |
| Threshold Voltage Temperature Coefficient                            | < +0.05       | %/°C  |
| Response Time                                                        | < 2           | ns    |
| Climatic Category                                                    | 55 / 125 / 56 |       |

## BOURNS®

**Americas:** Tel: +1 951-781-5500 • Email: [americus@bourns.com](mailto:americus@bourns.com)

**Mexico:** Tel: +52-614-478-0400 • Email: [mexicus@bourns.com](mailto:mexicus@bourns.com)

**Asia:** Tel: +886-2-2562-4117 • Email: [asiacus@bourns.com](mailto:asiacus@bourns.com)

**EMEA:** Tel: +36 88 885 877 • Email: [eurocus@bourns.com](mailto:eurocus@bourns.com)

[www.bourns.com](http://www.bourns.com)



**WARNING Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)**

\*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

## Applications

- Suppression of inductive switching or other transient events such as surge voltage at the circuit board level
- Replaces larger surface mount TVS Zener Diodes in many applications
- Electromagnetic compliance of end products
- On-board transient voltage protection of ICs and transistors

## ZV50S2220452NIR1 - SMD Low Voltage, High Surge Varistor

**BOURNS®**


### Device Ratings

| Model                 | V <sub>rms</sub> | V <sub>dc</sub> | V <sub>n</sub><br>@ 1 mA | ΔV <sub>n</sub> | V <sub>c</sub> | I <sub>c</sub><br>8/20 μs | P<br>max. | I <sub>max</sub><br>8/20 μs | C <sub>typ</sub><br>@ 1 kHz |
|-----------------------|------------------|-----------------|--------------------------|-----------------|----------------|---------------------------|-----------|-----------------------------|-----------------------------|
|                       | V                | V               | V                        | %               | V              | A                         | W         | A                           | pF                          |
| ZV 50 S 2220 452 NIR1 | 50               | 63              | 77.5                     | ±8.4            | 115            | 10                        | 0.020     | 4500                        | 8800                        |


### Product Dimensions

| Model                 | Dimension                              |                                        |                      |
|-----------------------|----------------------------------------|----------------------------------------|----------------------|
|                       | L                                      | W                                      | t (Max.)             |
| ZV 50 S 2220 452 NIR1 | $\frac{5.7 \pm 0.50}{(.224 \pm .020)}$ | $\frac{5.0 \pm 0.40}{(.197 \pm .016)}$ | $\frac{3.3}{(.130)}$ |

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$



### Soldering Pad Configuration

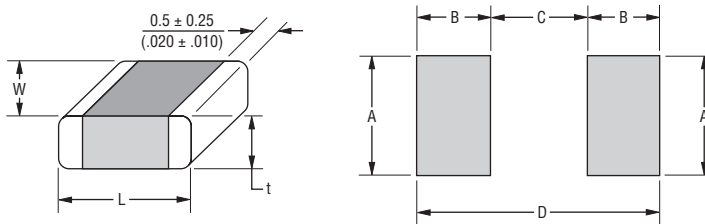

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

| Size | Dimension                              |                                         |                      |                      |                      |                      |
|------|----------------------------------------|-----------------------------------------|----------------------|----------------------|----------------------|----------------------|
|      | L                                      | W                                       | A                    | B                    | C                    | D                    |
| 2220 | $\frac{5.7 \pm 0.50}{(.224 \pm .020)}$ | $\frac{5.00 \pm 0.40}{(.197 \pm .016)}$ | $\frac{5.5}{(.217)}$ | $\frac{1.5}{(.060)}$ | $\frac{4.2}{(.165)}$ | $\frac{7.2}{(.283)}$ |

### How to Order

|                                                        |                                                                                                   |
|--------------------------------------------------------|---------------------------------------------------------------------------------------------------|
|                                                        | <b>ZV50S2220452NIR1</b>                                                                           |
| Series Designator                                      | ZV = ZV Series                                                                                    |
| Maximum Continuous Working Voltage (V <sub>rms</sub> ) | 50 = 50 Vrms                                                                                      |
| V <sub>n</sub> Tolerance                               | S = Special (see Device Rating Table)                                                             |
| Model Size                                             | • 2220                                                                                            |
| Maximum Surge Current (8/20 μs)                        | • 452 = 4500 A                                                                                    |
| End Terminations                                       | • Ni = NiSn barrier type end terminations suitable for Pb and Pb-free reflow soldering (standard) |
| Packaging                                              | R1 = Reel 180 mm                                                                                  |

### Typical Part Marking

No marking.

Specifications are subject to change without notice

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).


# ZV50S2220452NIR1 - SMD Low Voltage, High Surge Varistor



## Packaging Specifications


Complies with IEC 60286-3: 2022

### Tape

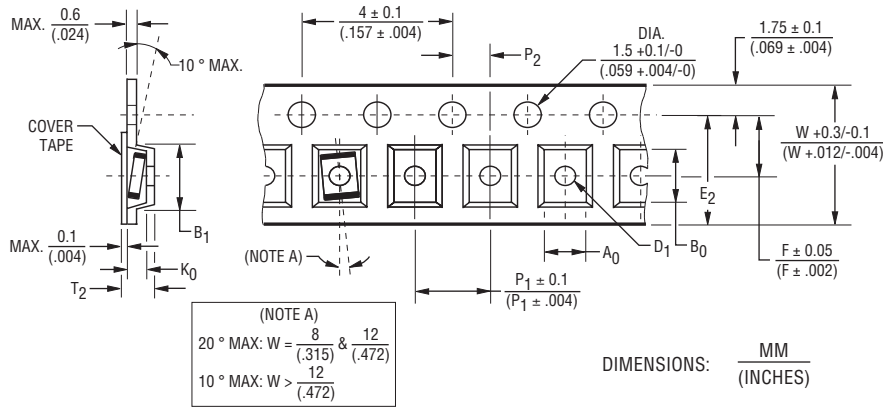

| Dimension                | Model Size             |
|--------------------------|------------------------|
|                          | 2220                   |
| A <sub>0</sub>           | $\frac{5.72}{(.225)}$  |
| B <sub>0</sub>           | $\frac{6.46}{(.254)}$  |
| K <sub>0</sub> MAX.      | $\frac{3.7}{(.145)}$   |
| B <sub>1</sub> MAX.      | $\frac{12.1}{(.475)}$  |
| D <sub>1</sub> DIA. MIN. | $\frac{1.5}{(.059)}$   |
| E <sub>2</sub> MIN.      | $\frac{14.25}{(.560)}$ |
| P <sub>1</sub>           | $\frac{8}{(.315)}$     |

### Reel

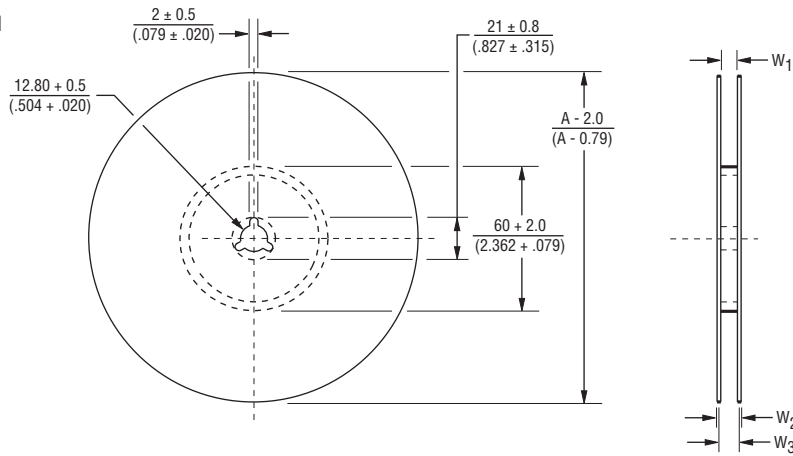

| Dimension           | Model Size                                     |
|---------------------|------------------------------------------------|
|                     | 2220                                           |
| F                   | $\frac{7.5}{(.295)}$                           |
| W                   | $\frac{16.0}{(.629)}$                          |
| T <sub>2</sub> MAX. | $\frac{9.5}{(.373)}$                           |
| W <sub>1</sub>      | $\frac{16.4 \pm 2.0}{(.644 \pm .079)}$         |
| W <sub>2</sub> MAX. | $\frac{22.4}{(.880)}$                          |
| W <sub>3</sub>      | $\frac{15.9}{(.625)}$ to $\frac{19.4}{(.764)}$ |
| A DIA.              | $\frac{180}{(7.087)}$                          |

## Packaging Quantities

| Part Number      | Voltage Rating (Vrms) | Quantity per Reel |
|------------------|-----------------------|-------------------|
| ZV50S2220452NIR1 | 50                    | 250               |

REEL SIZE: 180 MM

Specifications are subject to change without notice

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

**Terminology**

| <b>Term</b>                        | <b>Symbol</b>       | <b>Definitio</b>                                                                                                                                                                                                                                                                                                                                                                                  |
|------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated AC Voltage .....             | $V_{rms}$ .....     | Maximum continuous sinusoidal AC voltage (<5 % total harmonic distortion) which may be applied to the component under continuous operation conditions at +25 °C                                                                                                                                                                                                                                   |
| Rated DC Voltage.....              | $V_{dc}$ .....      | Maximum continuous DC voltage (<5 % ripple) which may be applied to the component under continuous operating conditions at +25 °C                                                                                                                                                                                                                                                                 |
| Supply Voltage.....                | $V$ .....           | The voltage by which the system is designated and to which certain operating characteristics of the system are referred; $V_{rms} = 1.1 \times V$                                                                                                                                                                                                                                                 |
| Leakage Current.....               | $I_{dc}$ .....      | The current passing through the varistor at $V_{dc}$ and at +25 °C or at any other specified temperature                                                                                                                                                                                                                                                                                          |
| Varistor Voltage .....             | $V_n$ .....         | Voltage across the varistor measured at a given reference current ( $I_n$ )                                                                                                                                                                                                                                                                                                                       |
| Reference Current.....             | $I_n$ .....         | Reference current = 1 mA DC                                                                                                                                                                                                                                                                                                                                                                       |
| Clamping Voltage .....             | $V_c$ .....         | The peak voltage developed across the varistor under standard atmospheric conditions, when passing an 8/20 $\mu s$ class current pulse                                                                                                                                                                                                                                                            |
| Protection Level                   |                     |                                                                                                                                                                                                                                                                                                                                                                                                   |
| Class Current.....                 | $I_c$ .....         | A peak value of current which is 1/10 of the maximum peak current for 100 pulses at two per minute for the 8/20 $\mu s$ pulse                                                                                                                                                                                                                                                                     |
| Voltage Clamping Ratio.....        | $V_c/V_{app}$ ..... | A figure of merit measure of the varistor clamping effectiveness as defined by the symbols $V_c/V_{app}$ , where ( $V_{app} = V_{rms}$ or $V_{dc}$ )                                                                                                                                                                                                                                              |
| Jump Start Transient .....         | $V_{jump}$ .....    | The jump start transient results from the temporary application of an overvoltage in excess of the rated battery voltage. The circuit power supply may be subjected to a temporary overvoltage condition due to the voltage regulation failing or it may be deliberately generated when it becomes necessary to boost start the car.                                                              |
| Rated Single Pulse .....           | $W_{max}$ .....     | Energy which may be dissipated for a single 10/1000 $\mu s$ pulse of a maximum rated current, with rated AC voltage or rated DC voltage also applied, without causing device failure                                                                                                                                                                                                              |
| Transient Energy                   |                     |                                                                                                                                                                                                                                                                                                                                                                                                   |
| Load Dump Transient .....          | WLD .....           | Load Dump is a transient which occurs in automotive environments. It is an exponentially decaying positive voltage which occurs in the event of a battery disconnect while the alternator is still generating charging current with other loads remaining on the alternator circuit at the time of battery disconnect.                                                                            |
| Rated Peak Single Pulse.....       | $I_{max}$ .....     | Maximum peak current which may be applied for a single 8/20 $\mu s$ pulse, with rated line voltage also applied, without causing device failure                                                                                                                                                                                                                                                   |
| Transient Current                  |                     |                                                                                                                                                                                                                                                                                                                                                                                                   |
| Rated Transient Average .....      | $P$ .....           | Maximum average power which may be dissipated due to a group of pulses occurring within a specified isolated time period, without causing device failure at 25 °                                                                                                                                                                                                                                  |
| Power Dissipation                  |                     |                                                                                                                                                                                                                                                                                                                                                                                                   |
| Capacitance.....                   | $C$ .....           | Capacitance between two terminals of the varistor measured @ 1 kHz                                                                                                                                                                                                                                                                                                                                |
| Non-linearity Exponent .....       | $\alpha$ .....      | A measure of varistor nonlinearity between two given operating currents, $I_n$ and $I_1$ as described by $I = k V \exp(a)$ , where:<br>- $k$ is a device constant,<br>- $I_1 < I < I_n$ and<br>- $a \log(I_1/I_n) / \log(V_1/V_n) = 1 / \log(V_1/V_n)$ , where:<br>- $I_r$ is reference current (1 mA) and $V_n$ is varistor voltage<br>- $I_1 = 10 I_n$ , $V_1$ is the voltage measured at $I_1$ |
| Response Time.....                 | $t_r$ .....         | The time lag between application of a surge and varistor's "turn-on" conduction action                                                                                                                                                                                                                                                                                                            |
| Varistor Voltage Temperature ..... | TC .....            | $(V_n @ 85 \text{ °C} - V_n @ 25 \text{ °C}) / (V_n @ 25 \text{ °C}) \times 60 \text{ °C} \times 100$                                                                                                                                                                                                                                                                                             |
| Coefficien                         |                     |                                                                                                                                                                                                                                                                                                                                                                                                   |
| Insulation Resistance .....        | IR.....             | Minimum resistance between shorted terminals and varistor surface                                                                                                                                                                                                                                                                                                                                 |
| Isolation Voltage .....            |                     | The maximum peak voltage which may be applied under continuous operating conditions between the varistor terminations and any conducting mounting surface                                                                                                                                                                                                                                         |
| Operating Temperature .....        |                     | The range of ambient temperature for which the varistor is designed to operate continuously as defined by the temperature limits of its climatic categor                                                                                                                                                                                                                                          |
| Climatic Category .....            | LCT/UCT/DHD .....   | LCT & UCT = Lower and Upper Category Temperature - the minimum and maximum ambient temperatures for which a varistor has been designed to operate continuously.<br>DHD = Dump Heat Test Duration                                                                                                                                                                                                  |
| Storage Temperature.....           |                     | Storage temperature range without voltage applied                                                                                                                                                                                                                                                                                                                                                 |
| Current/Energy Derating.....       |                     | Derating of maximum values when operated above UCT                                                                                                                                                                                                                                                                                                                                                |

REV. A 02/25

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at [www.bourns.com/docs/legal/disclaimer.pdf](http://www.bourns.com/docs/legal/disclaimer.pdf).

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns® products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns® products.

The characteristics and parameters of a Bourns® product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain "typical" applications are based on Bourns' knowledge of typical requirements in generic applications. Bourns assumes that "typical" applications include failsafe/backup features to address critical risks to users and are designed to allow rework of Bourns® product to avoid scrap of a device solely due to malfunctioning Bourns® product. The characteristics and parameters of a Bourns® product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns® product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns® product also can and do vary in different applications and actual performance may vary over time. Thus, users should always verify the actual performance of the Bourns® product in their specific devices and applications and make their own independent judgments regarding the suitability of Bourns® product and the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real-world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., IATF 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification even if such industry standard or qualification is a "state of art". Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns® products are not recommended, authorized or intended for use in applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage, such as without limitation nuclear, life-critical medical and certain automotive and aviation applications. Except as set forth in the bullet points below or unless expressly and specifically approved in writing on a case-by-case basis by an authorized Bourns' representative, use of any Bourns® products in such unauthorized high-risk applications is at the user's sole risk.

- Bourns considers implantable/invasive devices and devices/procedures designed as life-supporting or life-sustaining by the U.S. Food and Drug Administration or equivalent organizations outside of the United States as "life-critical" medical applications. Bourns expressly identifies those Bourns® standard products that are suitable for use in typical medical applications that are not life-critical in its publication entitled "Bourns Medical Grade Component Guide."
- Bourns expressly identifies those Bourns® standard products that are suitable for use in typical automotive applications associated with any Automate Safety Integrity Level (ASIL) in its publication entitled "Bourns Automotive Grade Component Guide." Bourns' designation of Bourns® product as compliant with the AEC-Q standard does not by itself mean that Bourns has approved such product for use in an automotive application.
- Bourns expressly identifies Bourns® standard products that are suitable for use in the typical aviation applications/systems requiring System Design Assurance Level (RTCA DO-254 DAL) of C, D or E in its publication entitled "Bourns Civilian Aerospace/Aviation Grade Component Guide." Bourns does not test its products for compliance with United States Federal Aviation Administration standards or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aviation applications. Use of Bourns® standard components in aviation applications associated with RTCA DO-254 DAL A or B without proper approval noted above shall be at the user's sole risk.
- Bourns will review and authorize on a case-by-case basis the use of Bourns® standard products which are at least AEC-Q compliant in space-related civil applications (rockets, satellites) with a negotiated cross-waiver and indemnity agreement.

The use and level of testing applicable to Bourns® custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns® custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns® standard products shall also apply to such Bourns® custom products.

Use of Bourns® products or Bourns' technology in military/defense applications must be reviewed with Bourns for compliance with applicable export control laws and embargoes. Users shall not sell, transfer, export or re-export (which includes transfers within a country) any Bourns® products or technology or technical data for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology or technical data in any facility which engages in activities relating to such devices. Further, Bourns® products and Bourns' technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products and technology may not, without prior authorization from Bourns and/or the Government of a country where such product/technology is designed and/or manufactured, be resold, transferred, or re-exported (including within the same country) to any party not eligible to receive commodities, software, and technical data originating in such country.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties (those not based on parameters specified in Bourns' data sheets and/or specifications), including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: <https://www.bourns.com/legal/disclaimers-terms-and-policies>

PDF: <https://www.bourns.com/docs/Legal/disclaimer.pdf>