



Features

- Lead free versions available
- RoHS compliant (lead free version)*
- Bidirectional EMI filtering
- ESD protection
- Protects 6 data lines

Applications


- Cell phones
- PDAs and notebooks
- Digital cameras
- MP3 players and GPS

2FAE-C15R - Integrated Passive & Active Device using CSP

General Information

The 2FAE-C15R device, manufactured using Thin Film on Silicon technology, provides ESD protection and EMI filtering for the data port of portable electronic devices such as cell phones, modems and PDAs. The device incorporates six low pass filter channels where each channel has a series 100 ohm resistor assuring a minimum of -30 dB attenuation from 800 MHz to 3 GHz. The device is suitable for EMI filtering of GSM, CDMA, W-CDMA, WLAN and Bluetooth frequencies.

Each internal and external port of the six channels includes a TVS diode for ESD protection. The ESD protection provided by the component enables a data port to withstand a minimum ± 8 kV Contact / ± 15 kV Air Discharge per the ESD test method specified in IEC 61000-4-2. The device measures 1.33 mm x 2.96 mm and is available in a 15 bump CSP package intended to be mounted directly onto an FR4 printed circuit board. The CSP device meets typical thermal cycle and bend test specifications without the use of an underfill material.

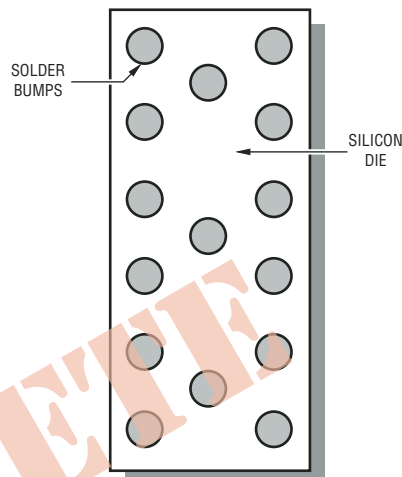

Electrical & Thermal Characteristics

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)	Symbol	Minimum	Nominal	Maximum	Unit
<i>Per Line Specification</i>					
Resistance	R	80	100	120	Ω
Capacitance @ 2.5 V 1 MHz	C	44	54	64	pF
Rated Standoff Voltage	V_{WM}		5.0		V
Breakdown Voltage @ 1 mA	V_{BR}	6.0			V
Forward Voltage @ 10 mA	V_F		0.8		V
Leakage Current @ 3.3 V	I_R		0.1	0.5	μA
Filter Attenuation @ 800 - 3000 MHz	S21	-30	-35		dB
ESD Protection: IEC 61000-4-2					
Contact Discharge		± 8			kV
Air Discharge		± 15			kV
Thermal Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)					
Operating Temperature Range	T_J	-40	25	+85	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55	25	+150	$^\circ\text{C}$
Power Dissipation Per Resistor	P_D			100	mW



Reliable Electronic Solutions

Asia-Pacific: TEL +886- (0)2 25624117 • FAX +886- (0)2 25624116
Europe: TEL +41-41 768 5555 • FAX +41-41 768 5510
The Americas: TEL +1-951 781-5492 • FAX +1-951 781-5700
www.bourns.com

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex

Specifications are subject to change without notice.


Customers should verify actual device performance in their specific applications.

2FAE-C15R - Integrated Passive & Active Device using CSP

BOURNS®

Mechanical Characteristics

This is a silicon-based device and is packaged using chip scale packaging technology. Solder bumps, formed on the silicon die, provide the interconnect medium from die to PCB. The bumps are arranged on the die in a regular grid formation. The grid pitch is 0.5 mm and the dimensions for the packaged device are shown below.

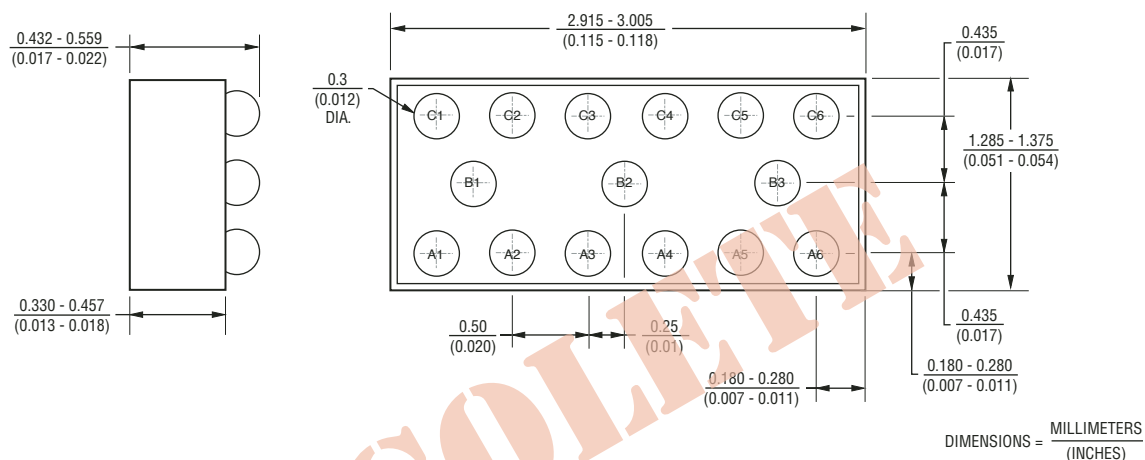


Reliability Data

Reliability data is gathered on an ongoing basis for Bourns® Integrated Passive and Active Devices.

“Package level” testing of the integrity of the solder joint is carried out on an independent Daisy-Chain test device. A 25-Pin Daisy Chain component is available from Bourns for this purpose (part number 2TAD-C25R). This is a 5 x 5 array featuring 0.5 mm pitch solder bumps. The Distance to Neutral Point (DNP) on that component is similar to that of the 2FAE-C15R and is thus deemed suitable for Thermal Cycle testing.

“Silicon level” reliability performance is based on similarity to other integrated passive CSP devices from Bourns.

Frequency Response

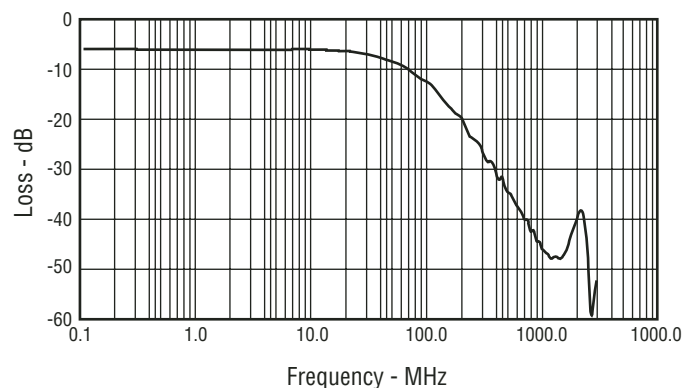


2FAE-C15R - Integrated Passive & Active Device using CSP

BOURNS®

Block Diagram

The CSP device block diagram below includes the pin names and basic electrical connections associated with each channel.

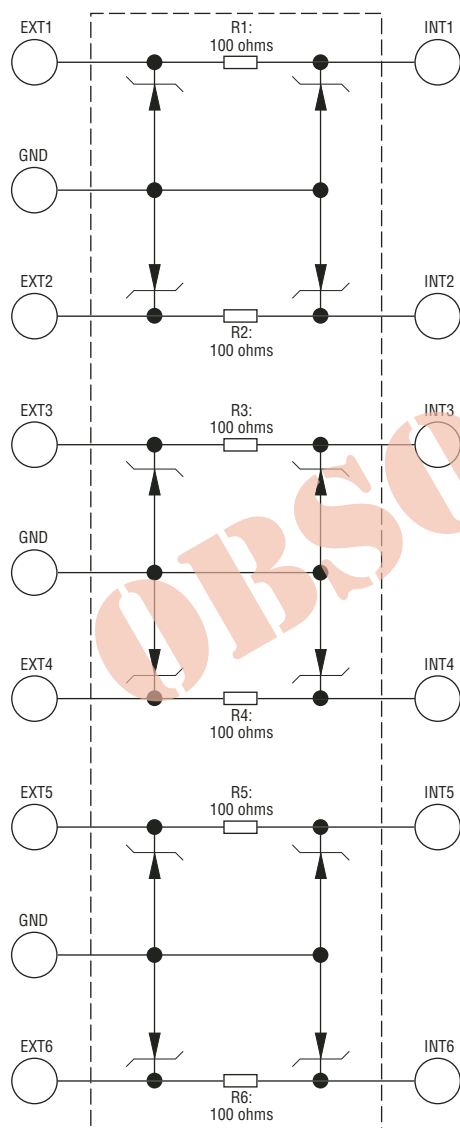

PCB Design and SMT Processing

Please consult the "Bourns Design Guide Using CSP" for notes on PCB design and SMT Processing.


How to Order

2 FAE - C15R

Thinfilmm _____
Model _____
Chipscale _____
No. of Solder Bumps _____
Packaging Option _____
R = Tape and Reel
Packaged 3000 pcs. / 7 " reel
Terminations _____
LF = Sn/Ag/Cu (lead free)
Blank = Sn/Pb

BOURNS®

The pin-out for the device is shown below with the bumps facing up.

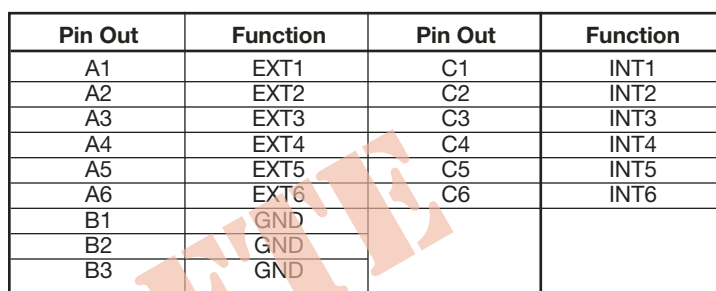

The surface mount product is packaged in an 8 mm x 4 mm Tape and Reel format per EIA-481 standard.



Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.