



Features

- Essentially infinite resolution
- Excellent rotational life
- High quality, rugged construction
- General purpose applications
- Non-standard features available
- Cost and space saving

6539/6639 - Precision Potentiometer

6539
Servo Mount

Electrical Characteristics¹

Standard Resistance Range.....	1K to 100K ohms.....	1K to 100K ohms.....
Resistance Tolerance		
Standard	$\pm 15\%$	$\pm 15\%$
Independent Linearity		
Standard	$\pm 2.0\%$	$\pm 2.0\%$
Resolution	Essentially infinite	Essentially infinite
Effective Electrical Angle	$340^\circ + 3^\circ$	$340^\circ + 3^\circ$
End Voltage	0.5% maximum	0.5% maximum
Output Smoothness	0.1%	0.1%
Power Rating (Voltage Limited)		
By Power Dissipation or 300 VAC, Whichever is Less)		
+70°C.....	1.0 watt	1.0 watt
+125°C.....	0 watt	0 watt
Dielectric Withstanding Voltage.....	MIL-STD-202, Method 301	MIL-STD-202, Method 301
Sea Level.....	750 VAC minimum	750 VAC minimum
Insulation Resistance		
(500 VDC).....	500 megohms minimum	500 megohms minimum

Environmental Characteristics¹

Operating Temperature	
Static Operation Temp Range	-65°C to +125°C
Dynamic Temp Range	+1°C to +125°C
Vibration	15G
Wiper Bounce	0.1 millisecond maximum
Shock	50G
Wiper Bounce	0.1 millisecond maximum
Rotational Life (No Load)	10,000,000 shaft revolutions
Total Resistance Shift.....	$\pm 10\%$ maximum

Mechanical Characteristics¹

Mechanical Angle.....	Continuous, Stops.....	Continuous, Stops.....
	($340^\circ + 8^\circ, -0^\circ$) available	($340^\circ + 8^\circ - 0^\circ$) available
Backlash.....	0.1° maximum	0.1° maximum
Shaft Runout	0.005 in. (0.13mm) T.I.R.	0.005 in. (0.13mm) T.I.R.
Shaft End Play	0.005 in. (0.13mm) T.I.R.	0.005 in. (0.13mm) T.I.R.
Shaft Radial Play	0.005 in. (0.13mm) T.I.R.	0.005 in. (0.13mm) T.I.R.
Pilot Diameter		
Runout	0.0025 in. (0.06mm) T.I.R.	
Lateral Runout	0.003 in. (0.08mm) T.I.R.	
Torque (Starting & Running)	0.5 oz.-in. (0.40 Ncm) max.	0.5 oz.-in. (0.40 Ncm) max.
Terminals	Rear Turret Type.....	Rear Turret Type.....
Bearing Type.....	Brass Sleeve	Nickel Plated Brass
Markings.....	Manufacturer's name, part number, resistance value and tolerance, linearity tolerance, wiring diagram and date code.	Manufacturer's name, part number, resistance value and tolerance, linearity tolerance, wiring diagram and date code.

¹At room ambient: +25°C nominal and 50% relative humidity nominal, except as noted.



Recommended Part Numbers

Part Number	Resistance (Ω)
6539S-1-102	1,000
6539S-1-502	5,000
6539S-1-103	10,000


BOLD-FACE LISTINGS ARE IN STOCK AND READILY AVAILABLE THROUGH DISTRIBUTION.

FOR OTHER OPTIONS CONSULT FACTORY.

Part Numbers		Resistance (Ω)
Bushing Mount	Mechanical Stops	
6639S-1-102	6639S-301-102	1,000
6639S-1-202	6639S-301-202	2,000
6639S-1-502	6639S-301-502	5,000
6639S-1-103	6639S-301-103	10,000
6639S-1-203	6639S-301-203	20,000

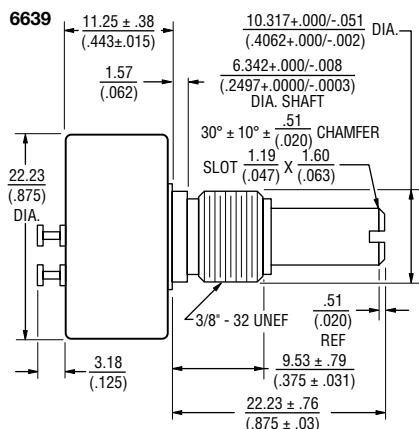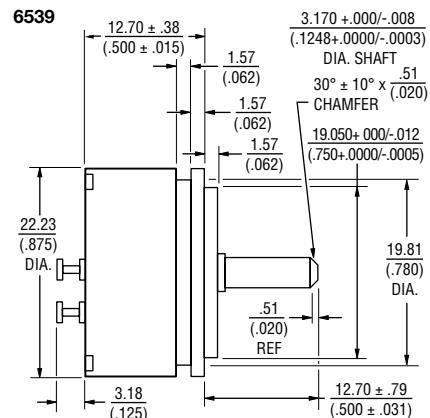

65/6639

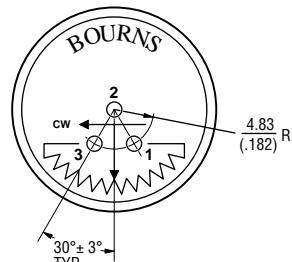

TOLERANCES: EXCEPT WHERE NOTED

DECIMALS: $XX \pm .38$ $XXX \pm .13$ $(.015)$ $(.005)$

FRACTIONS: $\pm 1/64$

DIMENSIONS: MM (IN.)

