

Features

- Power from 3 to 30 W
- Output voltage from 5 to 53 V
- Hi-Pot up to 4000 VAC
- Surface and through-hole mount
- RoHS compliant*

Applications

- High efficiency PoE interface and DC/DC controllers
- PoE PD controllers
- Synchronous flyback converters

PDC-EP, PDC-EF & PDC-RM Series - DC to DC Transformers

General Specifications

Operating Temperature

PDC023-EP13A05S, PDC030-EP13A12S, PDC030-RM08A53T -40 °C to +125 °C

PDC003-EF13A04T -40 °C to +100 °C

Storage Temperature -40 °C to 85 °C

Moisture Sensitivity Level 1

Additional Information

Click these links for more information:



Electrical Specifications @ 25 °C

Bourns Part Number	Primary Inductance		Leakage Inductance		DC Resistance @ 0.3 V		Turns Ratio @ 100 kHz, 0.1 V _{rms}		Hi-Pot	
PDC023-EP13A05S ¹	(5-3) @ 10 kHz, 0.1 V _{rms}	37 μH ±10 %	(5-3) w/ (1,2,6,7,9,10 shorted) @ 10 kHz, 0.1 V _{rms}	0.6 μH max.	(6,7-9,10)	5 mΩ max.	(5-3:6-10)	4.5 ±1 %	(1-10) w/ tie (2-3,6,7) @ 5 mA, 1 sec.	3000 VAC ref.
					(5-3)	68 ±20 % mΩ	(5-3:2-1)	1.81 ±1 %		
					(2-1)	123 ±10 % mΩ	(5-4:4-3)	1 ±1 %		
PDC030-EP13A12S	(1-2) @ 100 kHz, 0.1 V _{rms}	17.3 μH ±10 %	(1-2) w/ (4,5,6,7,9,10 shorted) @ 100 kHz, 0.1 V _{rms}	0.4 μH max.	(6,7-9,10)	12.6 mΩ max.	(3,4-5,6,6, 7-9,10)	2 ±2 %	(1,4-6,7) @ 5 mA, 6 sec.	1500 VAC ref.
					(1-2)	42 mΩ max.	(1-2:5-4)	1.71 ±2 %		
					(5-4)	99 mΩ max.				
PDC003-EF13A04T	(2-1) @ 100 kHz, 0.1 V _{rms}	710 μH ±10 %	(2-1) w/ (4-5, 7-8 shorted) @ 100 kHz, 0.1 V _{rms}	30 μH max.	(2-1)	2.8 mΩ max.	(2-1:4-5)	4.09 ±2 %	(1,4-8) @ 2 mA, 2 sec.	4000 VAC ref.
					(4-5)	370 mΩ max.	(2-1:8-7)	9.0 ±2 %		
					(8-7)	60 mΩ max.				
PDC030-RM08A53T	(3-1) @ 10 kHz, 0.1 V _{rms}	382 μH ±10 %	(3-1) w/ (10,11 short; Fly1, Fly2, Fly3, Fly4 short) @ 100 kHz, 0.1 V _{rms}	15 μH max.	(3-1)	380 mΩ max.	(3-1:12-10)	6.1 ±2 %	(3,12-Fly2, Fly4) @ 2 mA, 2 sec.	3000 VAC ref.
					(12-10)	65 mΩ max.	(3-1:Fly2- Fly1)	1.54 ±2 %		
					(Fly2-Fly1)	300 mΩ max.	(3-1:Fly4- Fly3)	7.2 ±2 %		
					(Fly4-Fly3)	55 mΩ max.				

¹ Saturation current of PDC023-EP13A05S with 3 A condition is (5-3): 20 % rolloff ref.



WARNING Cancer and Reproductive Harm - www.P65Warnings.ca.gov

*RoHS Directive 2015/863, Mar 31, 2015 and Annex.

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.


PDC-EP, PDC-EF & PDC-RM Series - DC to DC Transformers **BOURNS®**

Product Dimensions


PDC023-EP13A05S

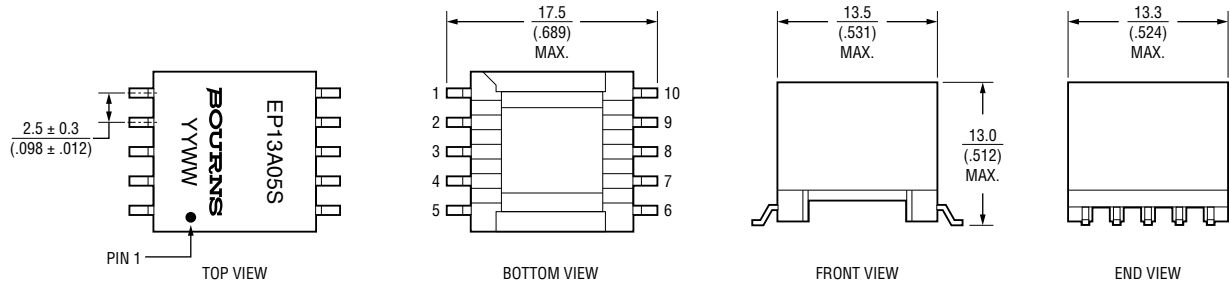

PDC030-EP13A12S

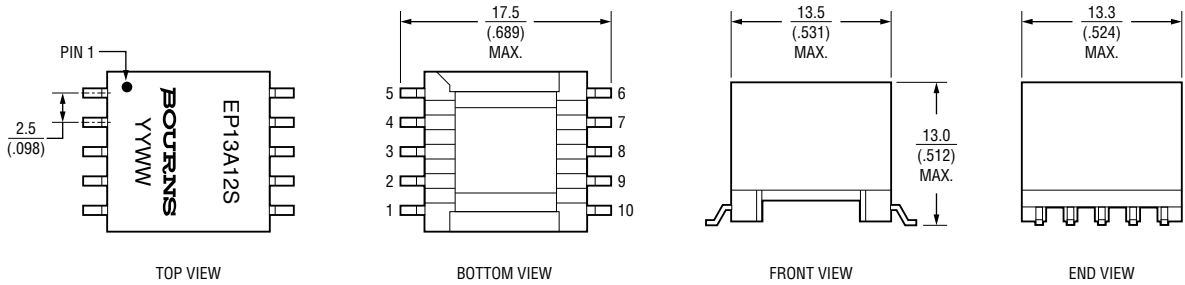

PDC003-EF13A04T

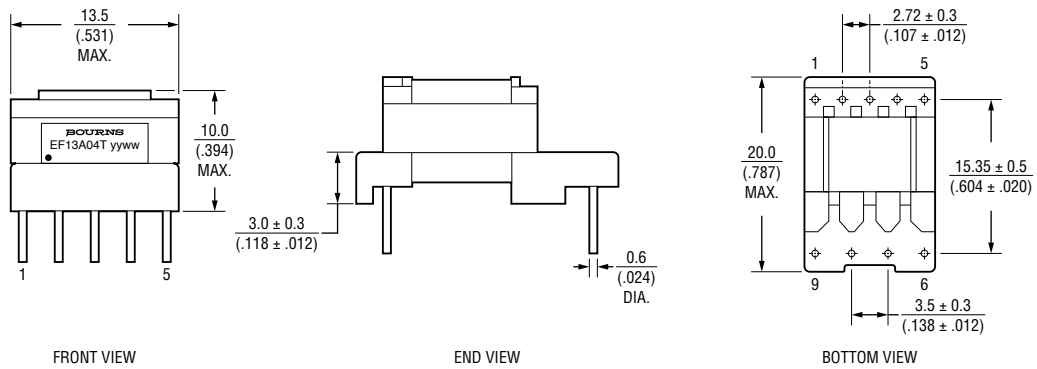

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

PDC-EP, PDC-EF & PDC-RM Series - DC to DC Transformers **BOURNS®**


Product Dimensions (continued)

PDC030-RM08A53T

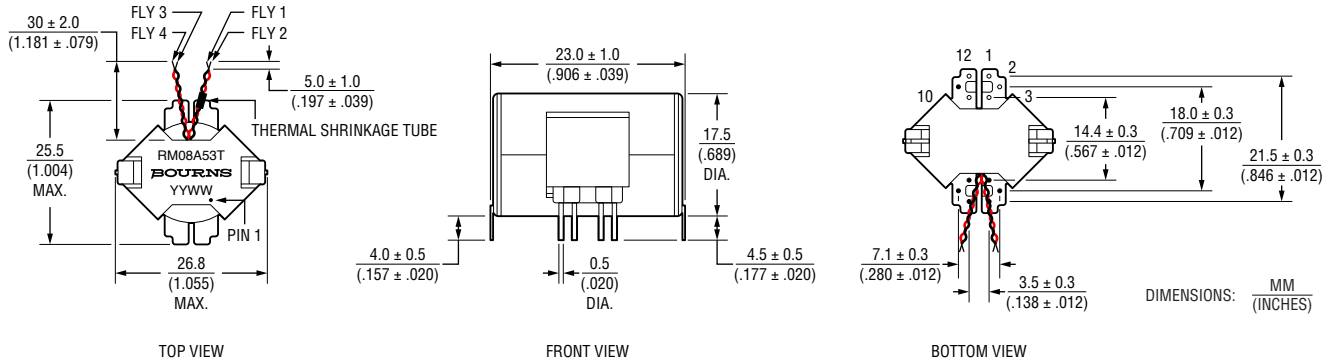


Recommended Layout


PDC023-EP13A05S PDC030-EP13A12S

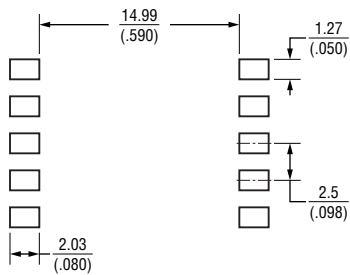

PDC003-EF13A04T



PDC030-RM08A53T

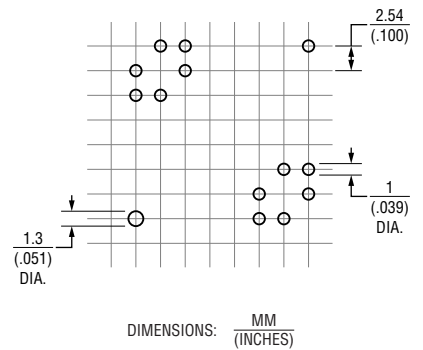

Specifications are subject to change without notice.


Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.


PDC-EP, PDC-EF & PDC-RM Series - DC to DC Transformers **BOURNS®**

Electrical Schematic


PDC023-EP13A05S

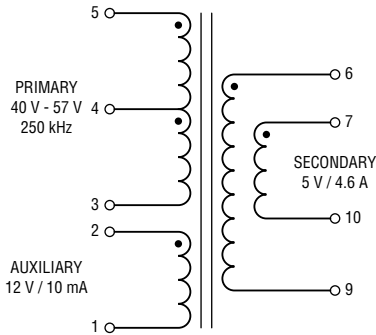


PDC003-EF13A04T



PDC030-EP13A12S



PDC030-RM08A53T



How To Order

PDC 010 - FD15 A 03 S

Model _____
PDC = DC to DC Transformer

Power Rating _____
010 = 10 W


Core and Size _____
FD15 = EFD15
EP13 = EP13
EF13 = EF12.6
RM08 = RM8

Sub-series _____
A = Sub-series A

Output Voltage _____
03 = 3 V

PCB type _____
S = SMD T = THT

Solder Profile

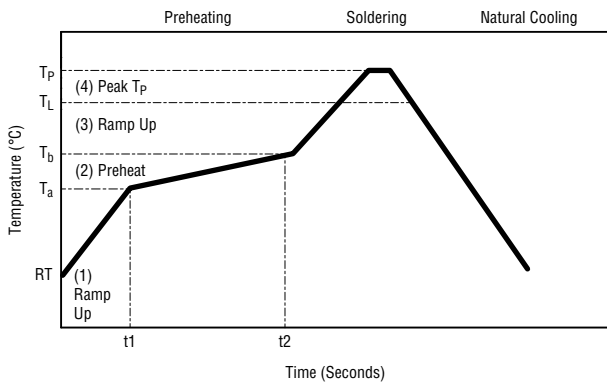


IR Reflow Profile		Pb-Free Assembly
Step #	Profile Feature	Condition / Duration
Step 1	Ramp Up Rate	3 °C / second max.
Step 2	Preheat 150 °C to 200 °C (T _a to T _b)	t1-t2: 60-120 seconds
Step 3	Ramp Up Rate (T _L to T _P)	3 °C / second max.
	Temperature Maintained Above 217 °C	60-150 seconds
Step 4	Peak Temperature (T _P)	260 +0/-5 °C
	Time Within 5 °C of Actual Peak Temperature	30 seconds max.
Ramp Down Rate (T _P to T _L)		6 °C/second max.

Specifications are subject to change without notice. Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.




PDC-EP, PDC-EF & PDC-RM Series - DC to DC Transformers **BOURNS®**

Packaging Specifications

PDC023-EP13A05S, PDC030-EP13A12S: 200 pcs./reel, 3 reels/carton, 600 pcs.

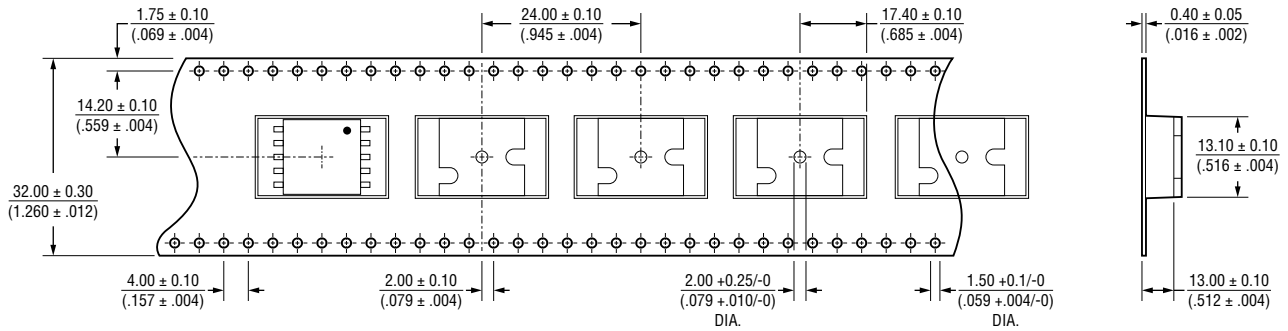

USER DIRECTION OF FEED →

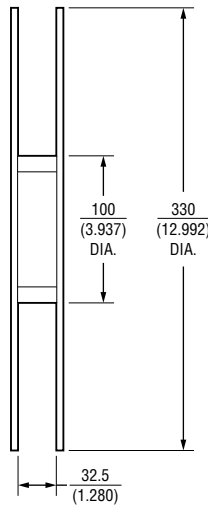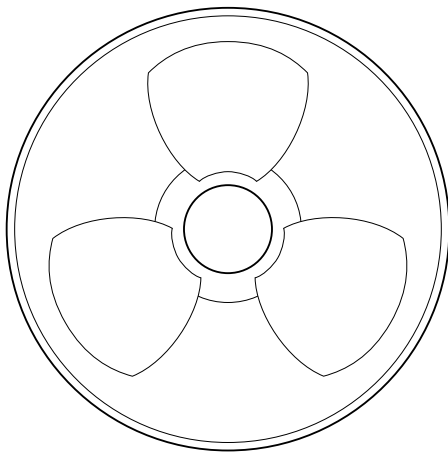

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

PDC003-EF13A04T: 47 pcs./tray, 4 trays/inner box, 6 boxes/carton, 1128 pcs.

PDC030-RM08A53T: 24 pcs./tray, 2 trays/inner box, 6 inner boxes/carton, 288 pcs.

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Email: asiacus@bourns.com

EMEA: Tel: +36 88 885 877 • Email: eurocus@bourns.com

The Americas: Tel: +1-951 781-5500 • Email: americus@bourns.com

www.bourns.com

REV. 10/23

Specifications are subject to change without notice.

Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.

