





Introduction

Bourns® offers a broad range of high-performance isolation transformers designed for critical signal and power isolation across a variety of topologies, including push-pull, flyback, half-bridge, and full-bridge.

Our transformers support safety-critical systems across automotive, industrial, medical, and energy applications — enabling compliance with stringent insulation, voltage, and thermal performance standards.

Key Features

- **High Isolation:** Up to 7640 V_{rms} with creepage up to 15 mm
- **Volt-μsec Ratings:** From 12 V-μsec to 375 V-μsec
- **Isolation Options:** Available with Functional, Basic, and Reinforced insulation
- **Safety Compliance:** Compliant with IEC 60950, IEC 61558, IEC 60601
- **Automotive-Grade:** AEC-Q200 compliance solutions available

Selection Parameters


When selecting the optimal Bourns® isolation transformer, consider the following critical parameters:

- **Turns Ratio:** Crucial for matching input/output voltages and enabling consistent circuit replication across systems. Multiple turns ratios are available.
- **Design:** Creepage, clearance, frequency range, and output power requirements.
- **Safety Compliance:** Choose based on application-specific isolation voltage, insulation class.
- **Topology:**
 - **Push-Pull:** Push-Pull: Ideal for applications with consistent power demands and stable input voltages (e.g., microcontroller bias, gate drivers). Open-loop design simplifies circuit complexity.
 - **Flyback/Forward:** Preferred in systems with variable loads or fluctuating voltage demands.
- **Space Constraint:** Push-pull transformers generally offer a smaller physical footprint and core size compared to flyback designs.



Power Isolation Transformers Overview

Color-coded topologies: **Push-Pull**, **Flyback**, **Gate Drive**, **Customized Low-Power**

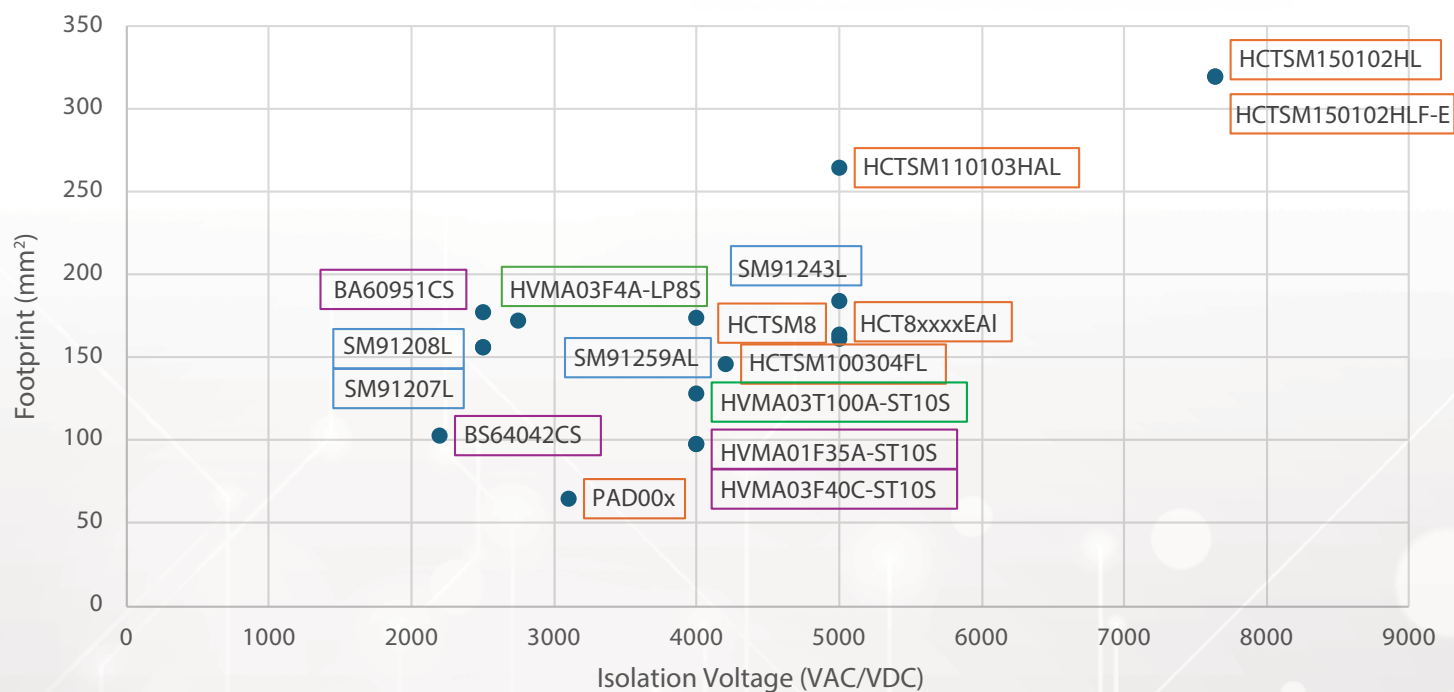

Custom Isolation Transformers Available


Need specific insulation, footprint, or performance? Bourns' Custom Magnetics team offers rapid-turn custom designs with advanced simulation, fast prototypes, custom materials, and support for unique safety/thermal/EMI requirements.

[Contact us](#) or fill out our [custom power transformer worksheet](#) to get started.

Push-Pull Transformers

Series	Photo	Working Voltage	Size (mm)	Creepage/Clearance	Insulation Type	Isolation Voltage (Hi-pot)	Operating Temp (°C)	Certifications	Compliance	Design Compatibility	Schematic Reference
PAD00x-T764		400 V _{rms}	9.85 x 6.55 x 4	—	Functional	3100 VAC	-40 to +125	IEC 62368	RoHS**	Isolated RS-485/RS-232 power supplies	Schematic 1
HCT8 Series (800 V) 		800 V	15.2 x 10.6 x 8.0	>8 mm	Reinforced	5000 VDC	-40 to +125	—	RoHS**, REACH, AEC-Q200	TI SN6501, SN6505B-Q1, SN6505D-Q1	Schematic 1
HCT8 Series (1000 V) 		1000 V	15.2 x 10.6 x 8.0	>8 mm	Basic	5000 VDC	-40 to +125	—	RoHS**, REACH, AEC-Q200	TI SN6501, SN6505B-Q1, SN6505D-Q1	Schematic 1
HCTSM8 		800 V _{rms} , 1000 V _{peak} *	15.2 x 10.8 x 6.5	>8 mm	Reinforced	5000 VDC	-40 to +125	IEC 60950-1, IEC 62368-1, IEC 60664-1, UL 62368-1 recognized*	RoHS**, REACH, AEC-Q200	TI SN6501, SN6505B, Nexperia NXF6501DC-Q100	Schematic 1


Schematic 1

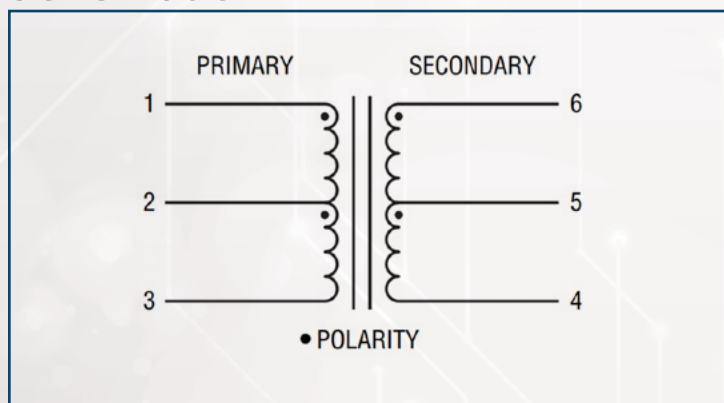


Push-Pull Transformers

Series	Photo	Working Voltage	Size (mm)	Creepage/ Clearance	Insulation Type	Isolation Voltage (Hi-pot)	Operating Temp (°C)	Certifications	Compliance	Design Compatibility	Schematic Reference
HCTSM100304FL		1000 V	15.7 x 10.8 x 7.5	>10 mm	Reinforced	4200 VAC	-40 to +125	IEC 60950-1, IEC 62368-1	RoHS**	TI SN6501, SN6505B	Schematic 2
HCTSM110103HAL 		1200 V	19.6 x 13.5 x 9.6	>11 mm	Reinforced	5000 VAC	-40 to +125	IEC/UL 60950-1, IEC/UL 62368-1, IEC 60664-1*	RoHS**, AEC-Q200	TI SN6501, SN6505B	Schematic 2
HCTSM150102HL		1500 V	21.3 x 15 x 9.6	>15 mm	Reinforced	7640 VDC	-40 to +125	IEC/UL 60664-1, IEC/UL 62368-1*	RoHS**	TI SN6501, SN6505B	Schematic 1
HCTSM150102HLF-E		1500 V	21.3 x 15.0 x 10.1 (max)	>15 mm	Reinforced Class F	7640 VDC	-40 to +150	IEC/UL 60664-1, IEC/UL 62368-1*	RoHS**	TI SN6501, SN6505B	Schematic 1

Schematic 1

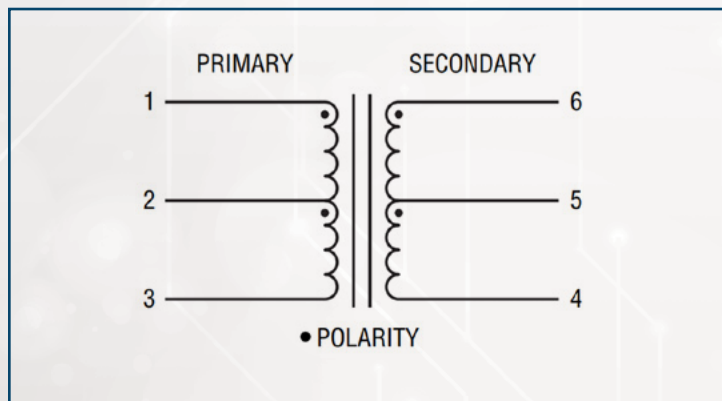

Schematic 2

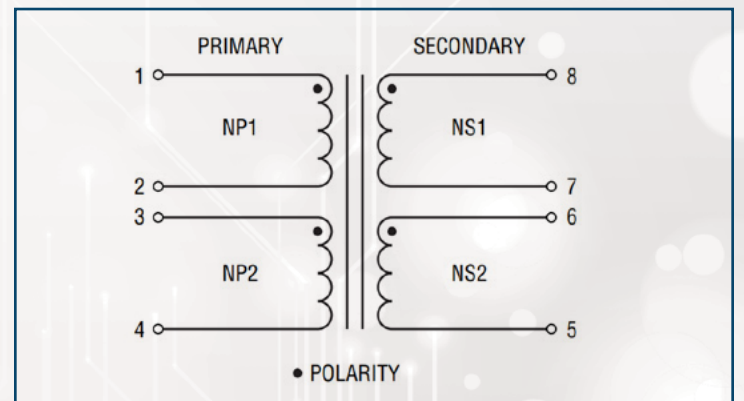


*See datasheets for details

**RoHS Directive 2015/863, Mar 31, 2015 and Annex.


Flyback Transformers

Series	Photo	Working Voltage	Size (mm)	Creepage/Clearance	Insulation Type	Isolation Voltage (Hi-pot)	Operating Temp (°C)	Certifications	Compliance	Design Compatibility	Schematic Reference
BS64042CS		4.5-60 V	9.8 x 10.5 x 11	>8 mm	Basic	2200 VAC	-40 to +125	—	RoHS*	Analog Devices ADP1031 Chipset	Schematic 3
BA60951CS 		800 V	16.9 x 10.5 x 5.97	>8 mm	Basic	2500 VAC	-40 to +155	IEC 61558	RoHS*, AEC-Q200	—	Schematic 4
HVMA01F35A-ST10S (1 Watt) 		800 – 1000 V	10.3 x 9.5 x 12.2	>10 mm/ >6 mm	Basic	4000 VAC	-40 to +125	IEC 61558-2, IEC 60664-1	RoHS*, AEC-Q200	—	Schematic 5
HVMA03F40C-ST10S (3 Watt) 		800 V	12.8 x 10 x 7.0	>8 mm/ >2 mm	Basic	4000 VAC	-40 to +125	IEC 60664-1	RoHS*, AEC-Q200	—	Schematic 7


Schematic 3

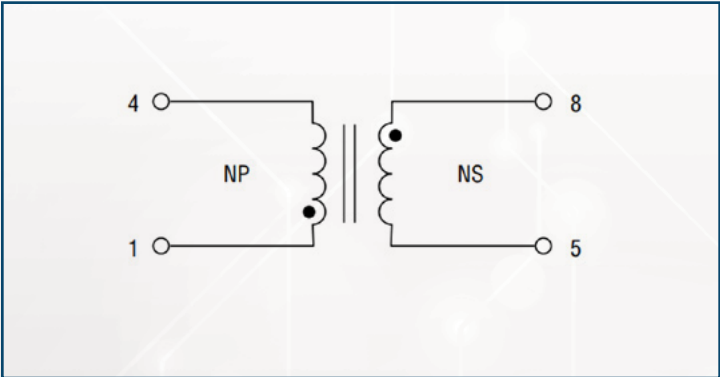


Schematic 4

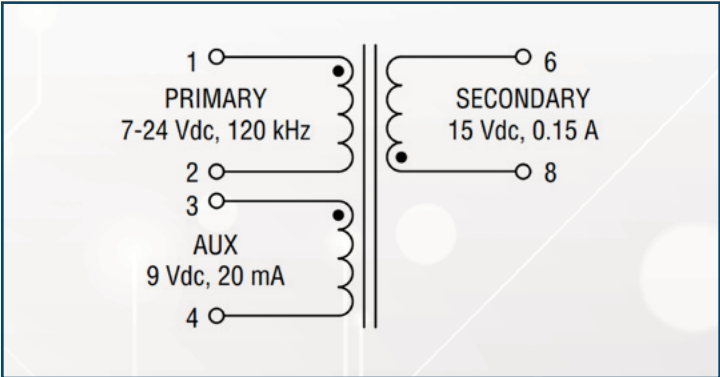

Schematic 5

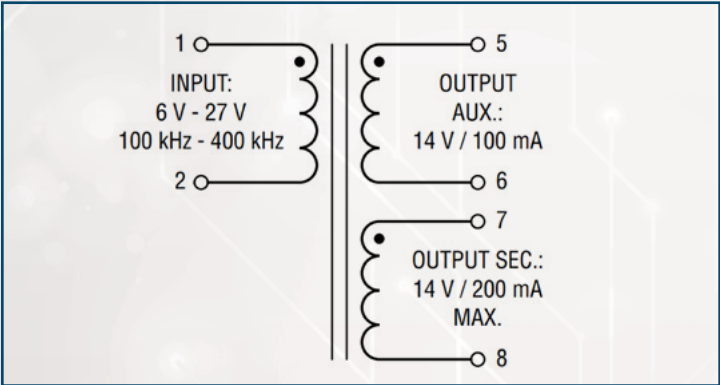

Schematic 7

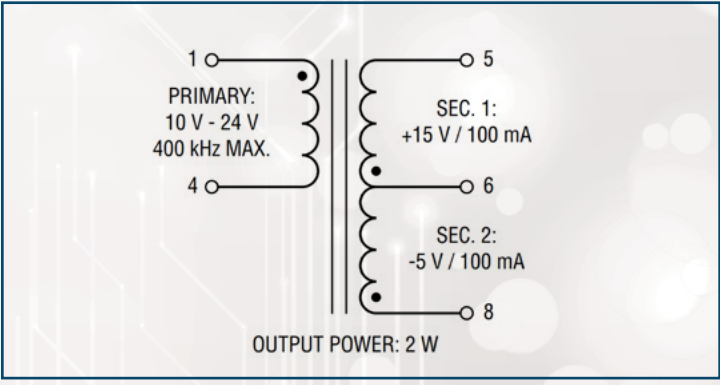


*RoHS Directive 2015/863, Mar 31, 2015 and Annex.


Gate Drive Transformers

Series	Photo	Working Voltage	Size (mm)	Creepage/Clearance	Insulation Type	Isolation Voltage (Hi-pot)	Operating Temp (°C)	Certifications	Compliance	Design Compatibility	Schematic Reference
HVMA03F4A-LP8S (2 Watt) 		900 V	10.3 x 9.5 x 12.2	>10 mm/ >6 mm	Basic	4000 VAC	-40 to +155	IEC 61558-2, IEC 60664-1	RoHS*, AEC-Q200	—	Schematic 6
HVMA03T100A-ST10S (3 Watt) 		1000 V	12.8 x 10 x 7.0	>10 mm/ >6 mm	Basic	4000 VAC	-40 to +155	IEC 61558-2, IEC 60664-1	RoHS*, AEC-Q200	—	Schematic 10

Schematic 6

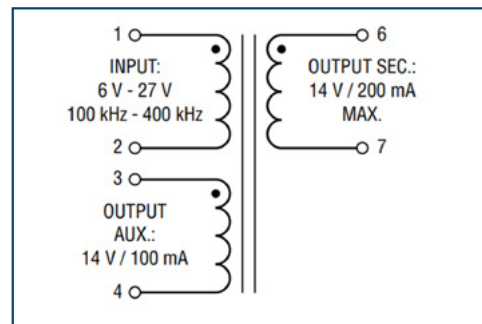


Schematic 10

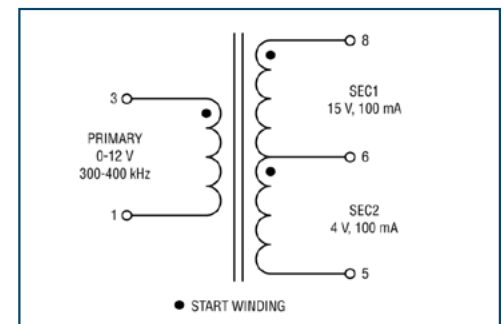


Customized Low-Power Transformers

Series	Photo	Working Voltage	Size (mm)	Creepage/Clearance	Insulation Type	Isolation Voltage (Hi-pot)	Operating Temp (°C)	Certifications	Compliance	Design Compatibility	Schematic Reference
SM91207L		400 V	13.2 x 11.8 x 11.6	>2 mm	Functional	2500 VAC	-40 to +125	IEC/UL 62368-1	RoHS**, REACH	TI SN6507	Schematic 2
SM91208L		400 V	13.2 x 11.8 x 11.6	>2 mm	Functional	2500 VAC	-40 to +125	IEC/UL 62368-1	RoHS**, REACH	TI SN6507	Schematic 2
SM91243L		1000 VDC	17.4 x 10.6 x 8.1	>10 mm	Reinforced	5000 VDC	-40 to +125	IEC 60664-1 IEC 62368-1	RoHS*	Allegro Micro Model AHV85000, AHV85040	Schematic 8
SM91259AL 		1000 V _{rms}	14.5 x 12 x 14	>10 mm	Reinforced	4000 VDC	-40 to +125	IEC 61558-1 UL 62368-1	RoHS*, AEC-Q200		Schematic 9


Schematic 2

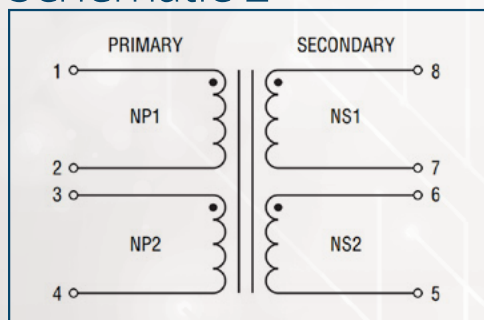

Schematic 8

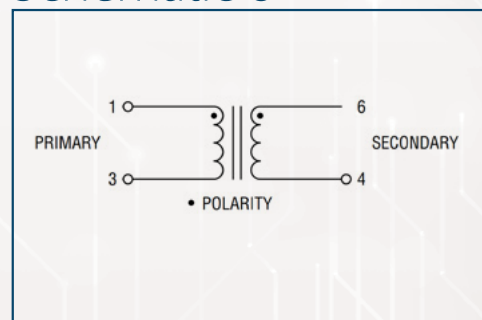

Schematic 9

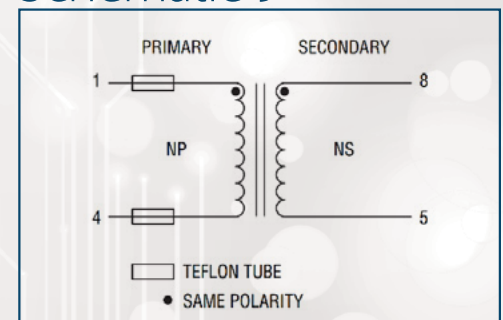

Worldwide Sales & Representative Offices



Country/Region	Phone	Email
Americas:	+1-951-781-5500	americus@bourns.com
Brazil:	+55 11 5505 0601	americus@bourns.com
China:	+86 21 64821250	asiacus@bourns.com
Europe, Middle East, Africa:	+36 88 885 877	eurocus@bourns.com
Japan:	+81 49 269 3204	asiacus@bourns.com
Korea:	+82 70 4036 7730	asiacus@bourns.com
Singapore:	+65 6348 7227	asiacus@bourns.com
Taiwan:	+886 2 25624117	asiacus@bourns.com
Other Asia-Pacific Countries:	+886 2 25624117	asiacus@bourns.com

Technical Assistance Region	Phone	Email
Asia-Pacific:	+886 2 25624117	techweb@bourns.com
Europe, Middle East, Africa:	+36 88 885 877	eurotech@bourns.com
Americas:	+1-951-781-5500	techweb@bourns.com

BOURNS®

www.bourns.com

Bourns® products are available through an extensive network of manufacturer's representatives, agents and distributors. To obtain technical applications assistance, a quotation, or to place an order, contact a Bourns representative in your area.

Specifications subject to change without notice. Actual performance in specific customer applications may differ due to the influence of other variables. Customers should verify actual device performance in their specific applications.

COPYRIGHT © 2025, BOURNS, INC. • LITHO IN U.S.A. • MIMEO • 12/25 • e/IC25213

"Bourns" is a registered trademark of Bourns, Inc. in the U.S. and other countries.