## BOURN

## **BTJ SERIES**

## **SMD Thermal Jumper Chip** for Thermal Dissipation



#### **Features**

- High thermal conductivity (AIN: 170 W/mK)
- High insulation resistance
- Low capacitance
- Operating temperature: -55 °C to +155 °C
- RoHS compliant\* and halogen free\*\*

### **Applications**

- Power supplies
- Switching power supplies
- Converters
- Amplifiers / RF, GaN
- Various ECUs

### Sustainability

- Small size reduces material use
- High pallet density for lower CO<sub>2</sub>
- Corrosion-resistant for longevity
- High efficiency, low power loss
- ISO 14001, low impact energy
- Responsibly sourced and produced

### **Product Overview**

The BTJ Series Thermal Jumper Chip for thermal dissipation is a unique surface mount component that provides high thermal conductivity while also possessing insulating properties.

This series is suitable for thermal conductivity and dissipation in a variety of mobile devices and electronic equipment.

In addition, by taking advantage of its insulating properties, the space between the heating element and the heat detection element can be occupied, enabling highly accurate heat detection.

The BTJ Series can simplify complex thermal design and reduce the temperature rise of key devices, which is expected to improve reliability at the system level.

Electrical Characteristics (@ T <sub>A</sub> = 25 °C Unless Otherwise Noted)									
	EIA Size	Thermal Resistance	Capacitance	Dielectric Withstand Voltage					
Bourns Part No.	(Inches)	(°C/W)	(mW/°C)	(pF)	kVac, RMS (60 Hz)				
BTJ050820T100	0508	6	160	0.15	> 1.5				
BTJ060320T100	0603	20	50	0.07	> 1.5				
BTJ061225T100	0612	4	250	0.26	> 1.5				
BTJ120625T100	1206	16	63	0.07	> 3.0				
BTJ122525T200	1225	4	250	0.26	> 1.5				
BTJ251225T200	2512	16	63	0.07	> 5.0				

#### **Environmental Characteristics**

Chausaus Causalitiaus

Storage Conditions	
Temperature	25 °C ±5 °C
Humidity	60 ±20 %
Moisture Sensitivity Level	1
ESD Classification (HBM)	N/A

Reliability To	ests and Requi	Reliability Tests and Requirements								
Test Item	Test Method	Condition								
Solderability	IEC 60115-1 4.17 JIS C-5201-1 4.47	245 ±5 °C for 3 seconds								
Terminal Strength (SMD) AEC-Q200-006		Pressurizing force for 60 seconds 0603: 9.8 N 0508, 0612, 1206, 1225, 2512: 19.6 N								
Bending Strength	IEC 5201-1 4.33 JIS C-5201-1 4.33	Bending once for 5 seconds 0603: 5 mm 0508, 1206, 0612: 3 mm 2512, 1225: 2 mm								
Temperature Cycling	IEC 60115-1 4.19 JIS C-5201-1 4.19	1000 cycles (-55 °C to +155 °C)								

#### How to Order

Internal Code -

■ Pin and laser diodes

Data servers

How to oraci	
Duo du est lel austifica	BTJ 0603 20 T10
Product Identifier ——————	
Product Size (EIA) —	
0508 1206	
0603 1225	
0612 2512	
Product Thickness (Inches) ————————————————————————————————————	
Packaging —	
T10 = Paper Tape, 5K pcs. per reel	T1L = Paper Tape, 1K pcs. per reel
T20 = Plastic Tape, 4K pcs. per reel	T2L = Plastic Tape, 1K pcs. per reel

Contact Infor	Contact Information									
www.bourns.com	Phone	Email								
Asia-Pacific	+886-2 2562-4117	asiacus@bourns.com								
Europe	+36 88 885 877	eurocus@bourns.com								
Mexico	+52 614 478 0400	mexicus@bourns.com								
The Americas	+1-951 781-5500	americus@bourns.com								

Specifications are subject to change without notice. Users should verify actual device performance in their specific applications. The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at www.bourns.com/docs/legal/disclaimer.pdf.













RoHS Directive 2015/863, Mar 31, 2015 and Annex.


<sup>\*\*</sup> Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (CI) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (CI) content is 1500 ppm or less.

# **BTJ SERIES**

SMD Thermal Jumper Chip for Thermal Dissipation



### **Product Dimensions**






DIMENSIONS:  $\frac{MM}{(INCHES)}$ 

Bourns Part No.	Size	Dimension								
DOUITIS FAIT ING.	Size	L	W	T	T1	L1				
DT1050020T100	0500	1.25 ± 0.13	2.00 ± 0.13	0.55 ± 0.13	0.50 ± 0.13	0.40 ± 0.13				
BTJ050820T100	0508	$(.049 \pm .005)$	$(.079 \pm .005)$	$(.022 \pm .005)$	$(.020 \pm .005)$	(.016 ± .005)				
BTJ060320T100	0603	1.60 ± 0.13	$0.80 \pm 0.13$	0.55 ± 0.13	$0.50 \pm 0.13$	$0.40 \pm 0.13$				
	0003	$(.063 \pm .005)$	$(.031 \pm .005)$	$(.022 \pm .005)$	$(.020 \pm .005)$	$(.016 \pm .005)$				
DT1061225T100	0612	1.60 ± 0.13	3.20 ± 0.13	$0.70 \pm 0.13$	0.635 ± 0.13	$0.40 \pm 0.13$				
BTJ061225T100	0612	$(.063 \pm .005)$	(.126 ± .005)	$(.028 \pm .005)$	$(.025 \pm .005)$	(.016 ± .005)				
BTJ120625T100	1206	3.20 ± 0.13	1.60 ± 0.13	$0.70 \pm 0.13$	0.635 ± 0.13	$0.50 \pm 0.13$				
D1J1200251100	1200	$(.126 \pm .005)$	$(.063 \pm .005)$	$(.028 \pm .005)$	$(.025 \pm .005)$	$(.020 \pm .005)$				
BTJ122525T200	1225	3.20 ± 0.13	6.40 ± 0.13	$0.70 \pm 0.13$	0.635 ± 0.13	$0.60 \pm 0.13$				
0131223231200	1225	(.126 ± .005)	(.252 ± .005)	$(.028 \pm .005)$	$(.025 \pm .005)$	$(.024 \pm .005)$				
BTJ251225T200	2512	6.40 ± 0.13	3.20 ± 0.13	0.70 ± 0.13	0.635 ± 0.13	0.60 ± 0.13				
D1J2512251200	2312	(.252 ± .005)	(.126 ± .005)	$(.028 \pm .005)$	$(.025 \pm .005)$	$(.024 \pm .005)$				

### **Solder Reflow Recommendations**

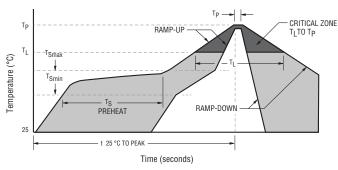

А	Stage 1 Preheat Ramp	j			
В	Stage 2 Preheat	Preheat Min./Max. Temperature Range	150 °C to 200 °C 60 s to 180 s		
С	Stage 3 Preheat to Main Heating	Max. Time Above Stated Temperature	217 °C 60 s to 150 s		
D	Main Heating	Max. Time Within 5 °C of Peak Temperature (260 °C)	255 °C to 260 °C 30 s max.		
Е	Cool Down	Rate from Peak Temperature	Approximately 6 °C/s		

#### CAUTION:

- This product can be damaged by rapid heating, cooling or localized heating.
- Heat shocks should be avoided. Preheating and gradual cooling recommended.
- Solder gun tip temperature should be kept below 280 °C and should not touch the device directly. Contact should be less than 3 seconds. A solder gun under 30 watts is recommended.
- · Excess solder volume can damage the body of the product.

Typical Part Marking									
Bourns Part Number	Bourns Part Marking	Bourns Part Number	Bourns Part Marking						
BTJ050820T100	No marking	BTJ120625T100	No marking						
BTJ060320T100	No marking	BTJ122525T200	No marking						
BTJ061225T100	No marking	BTJ251225T200	No marking						

Specifications are subject to change without notice. Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at <a href="https://www.bourns.com/docs/legal/disclaimer.pdf">www.bourns.com/docs/legal/disclaimer.pdf</a>.
















# **BTJ SERIES**

SMD Thermal Jumper Chip for Thermal Dissipation




### **Packaging Specifications**

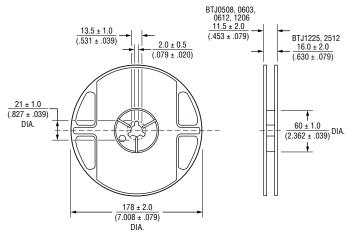

Bourns Part No.	Quantity			
Bourns Part No.	Per Reel	Per Box		
BTJ050820T100				
BTJ060320T100	5,000 pcs.	5 Reels		
BTJ061225T100	5,000 pcs.	3 Reels		
BTJ120625T100				
BTJ122525T200	4 000 nss	5 Reels		
BTJ251225T200	4,000 pcs.	3 Reels		
BTJ050820T1L0				
BTJ060320T1L0				
BTJ061225T1L0	1 000 nss	1 Reel		
BTJ120625T1L0	1,000 pcs.	i keei		
BTJ122525T2L0				
BTJ251225T2L0				


Paper Tape

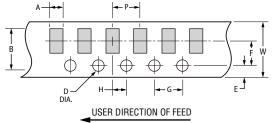

DIMENSIONS:  $\frac{MM}{(INCHES)}$ 

Paurne Dart No		Dimension											
Bourns Part No.	A	В	W	E	F	G	Н	T	D DIA.	Р			
BTJ050820T100	1.05 ± 0.20	1.80 ± 0.20						0.60 ± 0.10					
D130306201100	$\overline{(.041 \pm .008)}$	$(.079 \pm .008)$						$(.024 \pm .004)$					
DT1060330T100	1.55 ± 0.20	2.30 ± 0.20						0.75 ± 0.10					
BTJ060320T100	(.061 ± .008)	(.091 ± .008)	8.0 ± 0.20	1.75 ± 0.10	3.5 ± 0.05	4.0 ± 0.10	$2.0 \pm 0.05$	$(.030 \pm .004)$	1.50 +0.10/-0	$4.0 \pm 0.10$			
BTJ061225T100	1.90 ± 0.20	3.05 ± 0.20	$(.315 \pm .008)$	$(.069 \pm .004)$	(.138 ± .002)	$(.157 \pm .004)$	$(.079 \pm .002)$	0.75 ± 0.10	(.059 +.004/-0)	$(.157 \pm .004)$			
B1J0012231100	$\overline{(.075 \pm .008)}$	$(.120 \pm .008)$						$\overline{(.030 \pm .004)}$					
BTJ120625T100	1.90 ± 0.20	3.50 ± 0.20						0.75 ± 0.10					
B131200231100	(.075 ± .008)	(.138 ± .008)						$(.030 \pm .004)$					

### **Plastic Tape**

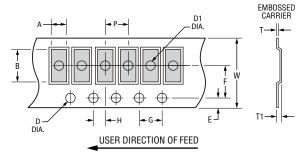

Pourne Part No		Dimension									
Bourns Part No.	А	В	W	E	F	G	Н	T	D DIA.	T1	Р
BTJ122525T200	3.40 ± 0.20	6.70 ± 0.20	12.0 ± 0.10	1.75 ± 0.10	5.5 ± 0.05	4.0 ± 0.10	2.0 ± 0.05	0.23 ± 0.10	1.50 +0.10/-0	0.85 ± 0.15	4.0 ± 0.10
BTJ251225T200	$\overline{(.134 \pm .008)}$	$\overline{(.264 \pm .008)}$	$\overline{(.472 \pm .004)}$	$(.069 \pm .004)$	(.217 ± .002)	$\overline{(.157 \pm .004)}$	$(.079 \pm .002)$	$(.009 \pm .004)$	(.059 +.004/-0)	$\overline{(.033 \pm .006)}$	(.157 ± .004)

REV. 11/2

Specifications are subject to change without notice. Users should verify actual device performance in their specific applications.

The products described herein and this document are subject to specific legal disclaimers as set forth on the last page of this document, and at <a href="https://www.bourns.com/docs/legal/disclaimer.pdf">www.bourns.com/docs/legal/disclaimer.pdf</a>.



PAPER CARRIER











# **BOURNS**®

# **Legal Disclaimer Notice**

This legal disclaimer applies to purchasers and users of Bourns® products manufactured by or on behalf of Bourns, Inc. and its affiliates (collectively, "Bourns").

Unless otherwise expressly indicated in writing, Bourns\* products and data sheets relating thereto are subject to change without notice. Users should check for and obtain the latest relevant information and verify that such information is current and complete before placing orders for Bourns\* products.

The characteristics and parameters of a Bourns° product set forth in its data sheet are based on laboratory conditions, and statements regarding the suitability of products for certain types of applications are based on Bourns' knowledge of typical requirements in generic applications. The characteristics and parameters of a Bourns° product in a user application may vary from the data sheet characteristics and parameters due to (i) the combination of the Bourns° product with other components in the user's application, or (ii) the environment of the user application itself. The characteristics and parameters of a Bourns° product also can and do vary in different applications and actual performance may vary over time. Users should always verify the actual performance of the Bourns° product in their specific devices and applications, and make their own independent judgments regarding the amount of additional test margin to design into their device or application to compensate for differences between laboratory and real world conditions.

Unless Bourns has explicitly designated an individual Bourns® product as meeting the requirements of a particular industry standard (e.g., ISO/TS 16949) or a particular qualification (e.g., UL listed or recognized), Bourns is not responsible for any failure of an individual Bourns® product to meet the requirements of such industry standard or particular qualification. Users of Bourns® products are responsible for ensuring compliance with safety-related requirements and standards applicable to their devices or applications.

Bourns\* products are not recommended, authorized or intended for use in nuclear, lifesaving, life-critical or life-sustaining applications, nor in any other applications where failure or malfunction may result in personal injury, death, or severe property or environmental damage. Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any Bourns\* products in such unauthorized applications might not be safe and thus is at the user's sole risk. Life-critical applications include devices identified by the U.S. Food and Drug Administration as Class III devices and generally equivalent classifications outside of the United States.

Bourns expressly identifies those Bourns® standard products that are suitable for use in automotive applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns® standard products in an automotive application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk. If Bourns expressly identifies a sub-category of automotive application in the data sheet for its standard products (such as infotainment or lighting), such identification means that Bourns has reviewed

its standard product and has determined that if such Bourns' standard product is considered for potential use in automotive applications, it should only be used in such sub-category of automotive applications. Any reference to Bourns' standard product in the data sheet as compliant with the AEC-Q standard or "automotive grade" does not by itself mean that Bourns has approved such product for use in an automotive application.

Bourns' standard products are not tested to comply with United States Federal Aviation Administration standards generally or any other generally equivalent governmental organization standard applicable to products designed or manufactured for use in aircraft or space applications. Bourns expressly identifies Bourns' standard products that are suitable for use in aircraft or space applications on such products' data sheets in the section entitled "Applications." Unless expressly and specifically approved in writing by two authorized Bourns representatives on a case-by-case basis, use of any other Bourns' standard product in an aircraft or space application might not be safe and thus is not recommended, authorized or intended and is at the user's sole risk.

The use and level of testing applicable to Bourns' custom products shall be negotiated on a case-by-case basis by Bourns and the user for which such Bourns' custom products are specially designed. Absent a written agreement between Bourns and the user regarding the use and level of such testing, the above provisions applicable to Bourns' standard products shall also apply to such Bourns' custom products.

Users shall not sell, transfer, export or re-export any Bourns® products or technology for use in activities which involve the design, development, production, use or stockpiling of nuclear, chemical or biological weapons or missiles, nor shall they use Bourns® products or technology in any facility which engages in activities relating to such devices. The foregoing restrictions apply to all uses and applications that violate national or international prohibitions, including embargos or international regulations. Further, Bourns® products and Bourns technology and technical data may not under any circumstance be exported or re-exported to countries subject to international sanctions or embargoes. Bourns® products may not, without prior authorization from Bourns and/or the U.S. Government, be resold, transferred, or re-exported to any party not eligible to receive U.S. commodities, software, and technical data.

To the maximum extent permitted by applicable law, Bourns disclaims (i) any and all liability for special, punitive, consequential, incidental or indirect damages or lost revenues or lost profits, and (ii) any and all implied warranties, including implied warranties of fitness for particular purpose, non-infringement and merchantability.

For your convenience, copies of this Legal Disclaimer Notice with German, Spanish, Japanese, Traditional Chinese and Simplified Chinese bilingual versions are available at:

Web Page: http://www.bourns.com/legal/disclaimers-terms-and-policies PDF: http://www.bourns.com/docs/Legal/disclaimer.pdf

C1753 12/14/23R



**CALIFORNIA WARNING:** Can expose you to lead, a carcinogen and reproductive toxicant. See <a href="https://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>

